

JET AIR 12-A™ Automatic

HYTORC...the only Auto-cycle, Continuous

Tool Rotation Air pump in the world!

For Safety

(Operated via Air Remote Control)

For Precision

(Micro-Seat Pressure Regulator)

For Portability

(1 Gallon Reservoir with Heavy Duty Roll Cage)

For Universality


(For All Single or Double Acting Cylinders)

For Reliability

(Exclusive Directional Control Valve)

For User-Friendliness

(With Auto Release Oil Pressure Valve)

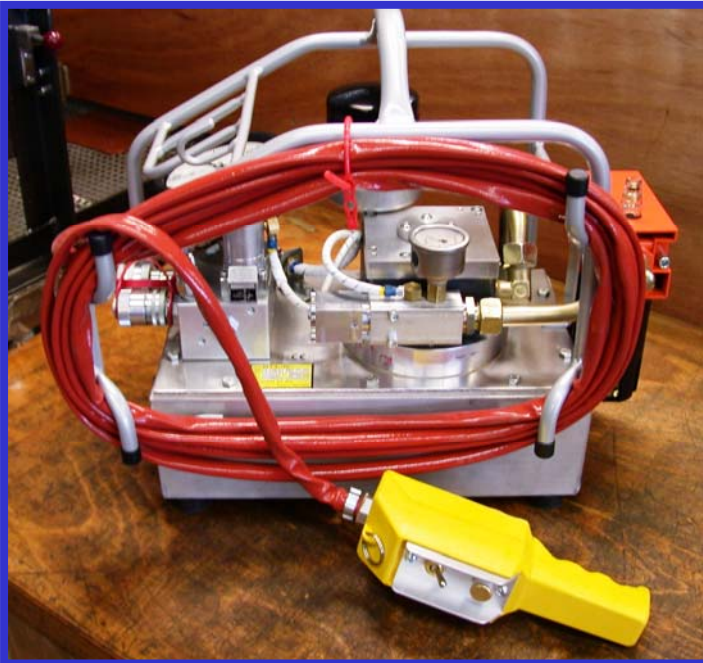

Automatic AIR pump will drive any HYTORC Tool !

JET AIR 12-A™ Automatic

Source :	Air
Requirement :	55 – 150 psi 50 cfm
Max. Oil Flow:	730 cu.in/min (12 l/min.)
Remote:	5.0m Standard
Hose Length:	4.5m Standard
Gauge:	4" Dia. 10,000 PSI
Weight:	22 Kgs

The JET AIR 12-A™ Automatic, Super-flow-Tri speed pump is the smallest, heavy duty power pack in the industry. **FIRST** with Auto-cycle and Tri-speed Automatic. **FIRST** All-tool adjustability: Regular ratchet tools (10,000/1,500 psi max.) or HYTORC's continuous rotation XXI (10,000/10,000 psi max.) Models may change very slightly depending on availability.

6 Eton Road, Keswick SA 5035, Australia

www.hytoresouthpacific.com.au

Phone +61 8 8293 8411

Fax +61 8 8297 0948