


# HYTORC 115/230



24 Volt  
Remote Control  
with  
Safety Button

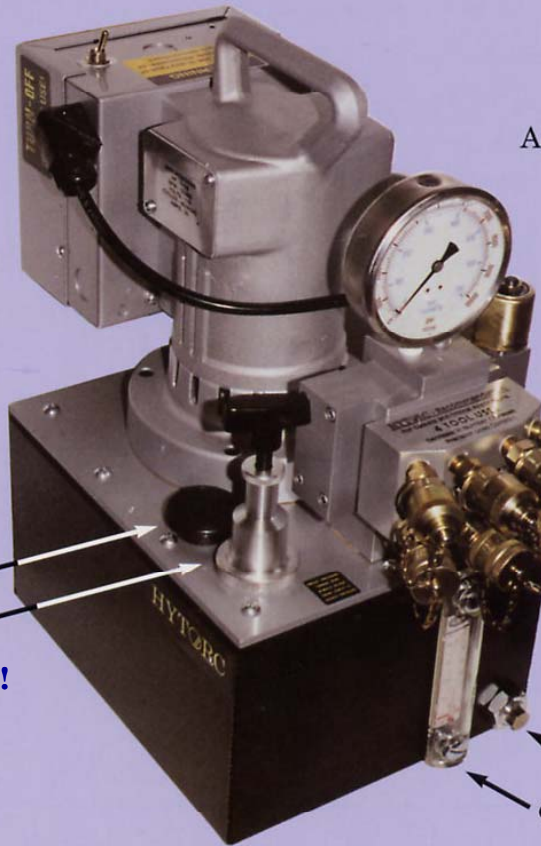

Easy Access Oil Fill  
Precision Pressure Regulator

10,000/1500  
10,000/10,000  
Adjustable Return  
Pressure

4 Port  
for Simultaneous  
Precision Speed  
Torquing

Oil Drain Knob  
Oil Level/Temperature Gauge

**For continuous non stop rotation!**

**Suitable for all Hydraulic  
Equipment; Including single  
and double acting cylinders**

**Name:** HYTORC® 115  
**Description:** Electric 115V 10K PSI  
**Pump Replaces:** Econo SST-10

**Name:** HYTORC® 230  
**Description:** Electronic 230V 10K PSI  
**Replaces:** Econo SST-20

**BOTH PUMPS HAVE  
2 STAGE MOTORS:**

STAGE 1: 720 flow  
rate at zero psi

Shift point between  
900 to 1200 psi

STAGE 2: 55 flow rate  
at 10000 psi

**Specifications:**

	<u>HYTORC® 115</u>	<u>HYTORC® 230</u>
<b>Source:</b>	Electric	Electric
<b>Requirement:</b>	115V SGL.	220V SGL.
<b>Max Oil Flow:</b>	720 CU. IN.	720 CU. IN.
<b>Remote:</b>	20' Standard	20' Standard
<b>Hose Length:</b>	15' Standard	15' Standard
<b>Gauge:</b>	4" PSI	4" PSI
<b>Weight:</b>	46 LBS.**	46 LBS.**

\*\*Without Oil

## Advantages/New Features

- New Low Profile maintenance free directional control valve (A HYTORC® Exclusive)
- Automatic shutoff
- Automatic oil dump
- 30% lighter (25 lbs.) than an equivalent pump
- Excellent low voltage operation
- New precision pressure regulator
- Oil sight/temperature gauge and drain plug on reservoir
- Easy fill oil plug

333 Route 17 North  
Mahwah, New Jersey 07430  
U.S.A.  
Tel.: 610-247-8990  
Fax: 877-770-9997