


HY-TWIN AIR

The HY-TWIN AIR hydraulic pump gives the operator the power they need to utilize 10,000 ft. lb. Fitted with a five-gallon reservoir this pump will have enough oil to power up to four large tools at once. Portability is no longer an issue because our HY-TWIN pumps come with wheel casters that ensure you can roll this pump from application to application giving you the mobility you've come to expect when using HYTORC Hydraulic Power Systems.

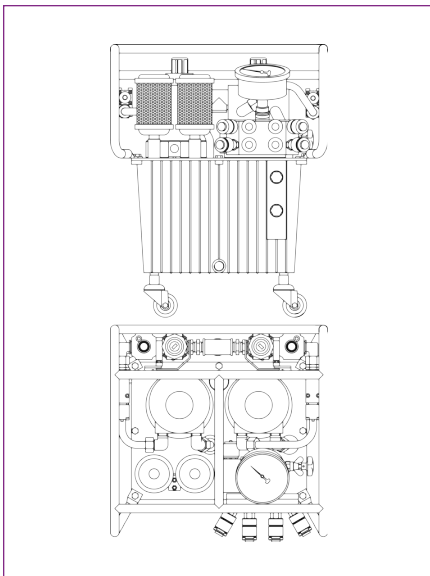

PUMP SPECIFICATIONS AND FEATURES

Air Consumption	7,200 cu.in./sec. (118 l/sec.)
Gauge	0-10 k PSI (+/-1% Accuracy)
Reservoir Capacity (Tank optional)	5 gals. / 19 l
Stages	3
Weight	98 lbs. / 44.4 kg
Maximum Oil Flow Rate	1,500 cu. in./min. / 25 l/min.
Oil Cooler	Yes
Protective Caging	Yes
15' Remote Control	Yes
15' Twin Line Steel Braided Hydraulic Hose	Yes



HYTORC MISSION STATEMENT

HYTORC'S MISSION IS TO OPTIMIZE SAFETY, QUALITY AND SCHEDULE IN INDUSTRIAL BOLTING THROUGH INNOVATIVE SOLUTIONS, AND AN UNYIELDING COMMITMENT TO WORLD-CLASS CUSTOMER SERVICE.

MOBILE SERVICES



Mobile service, maintenance, and on-site training to get you and your tools back on the job faster than ever before.

WORLDWIDE SERVICE



The HYTORC Universe is made up of over 1,000 trained bolting specialists to support your bolting needs in over 100 countries.

THE HYTORC STANDARD



With over 50 years of experience focused entirely on developing the highest quality industrial bolting systems, HYTORC remains committed to higher performance and service and offers superior technology, quality, and support.

The World's Most Trusted Industrial Bolting Systems

HYTORC owns all content, copyrights, trademarks and patents in this document. © 2021 HYTORC. Any unauthorized use or distribution of any material from this document is strictly prohibited.



Headquarters:
333 Route 17 N., Mahwah, NJ 07430
+1-201-512-9500

Email:
info@hytorc.com

Phone:
1-800-FOR-HYTORC

Online:
hytorc.com