



## CLICKER WRENCH

The HYTORC Clicker Wrench is a simple and convenient tool for tightening nuts to specification in a wide range of bolting applications. This micro-adjustable torque wrench is available in various drive sizes and torque capacities. Handles are lightly knurled for a tough, non-slip grip. The tool has a spring-loaded pull down Lock Ring and an easy-to-read laser-etched scale to quickly and easily set torque. The wrench also features a quick-release button for easy socket removal. The HYTORC Clicker Wrench is supplied with an ISO certified calibration certificate.

### QUICK RELEASE BUTTON




The Quick Release Button, conveniently located near the drive, easily engages and disengages the socket from the drive and provides strong socket retention.

### RATCHET REVERSING LEVER




The Ratchet Reversing Lever quickly and conveniently changes the ratcheting direction. The lever has three positions: Clockwise, Counter-Clockwise, and Locked.

### LOCK RING

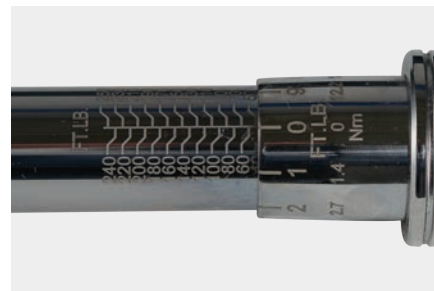

The spring-loaded positive Lock Ring easily and securely sets the torque value. The laser-etched torque scales are clearly legible in both imperial and metric.

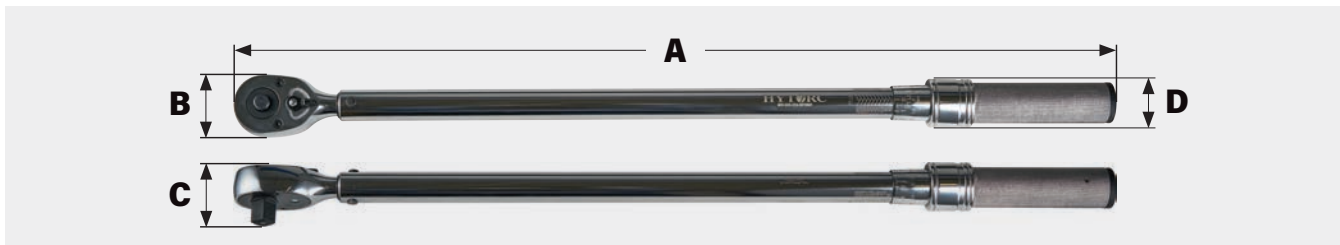

**ACCURACY**

± 4% CW ± 6% CCW of indicated value, CW, from 20% to 100% of full scale.

The HYTORC Clicker Wrench is calibrated to meet accuracy specifications as per ASME B107.300-2010 and in compliance with ISO 17025:2017.

**DUAL SCALE MODELS - TORQUE SCALE IN BOTH IMPERIAL AND METRIC**

CONFIGURATIONS	DRIVE	A	B	C	D	WEIGHT	PRIMARY TORQUE RANGE	INCREMENTS
IMPERIAL		in.				lb		
MW-006-250-MRMH	3/8	11.25	1.06	0.93	1.06	0.95	30-250 in-lbs.	1
MW-006-1000-MRMH	3/8	16.00	1.43	1.20	1.40	2.50	150-1,000 in-lbs.	5
MW-006-100-MFRMH	3/8	16.00	1.43	1.20	1.40	2.55	10-100 ft-lbs.	0.5
MW-008-150-MFRMH	1/2	19.00	1.70	1.40	1.40	3.15	20-150 ft-lbs.	1
MW-008-250-MFRMH	1/2	24.40	1.70	1.40	1.40	3.15	30-250 ft-lbs.	1
MW-010-400-MFRMH	3/4	34.25	2.50	2.10	1.40	10.30	50-400 ft-lbs.	5
MW-010-600-MFRMH	3/4	42.00	2.50	2.00	1.15	11.85	100-600 ft-lbs.	5
MW-020-1000-MFRMH	1	70.00	3.00	3.00	1.50	25.10	200-1,000 ft-lbs.	5

CONFIGURATIONS	DRIVE	A	B	C	D	WEIGHT	SECONDARY TORQUE RANGE	INCREMENTS
METRIC	IN.	MM				KG		
MW-006-250-MRMH	3/8	286	27	24	27	0.4	4.0-27.7 Nm	.12
MW-006-1000-MRMH	3/8	406	36	30	36	1.1	19.8-110.2 Nm	.6
MW-006-100-MFRMH	3/8	406	36	30	36	1.2	16.9-132.2 Nm	.7
MW-008-150-MFRMH	1/2	483	43	36	36	1.4	34-197 Nm	1.4
MW-008-250-MFRMH	1/2	620	43	36	36	1.4	47-332 Nm	1.4
MW-010-400-MFRMH	3/4	870	64	53	36	4.7	85-525 Nm	3.4
MW-010-600-MFRMH	3/4	1067	64	51	29	5.4	169-779 Nm	6.8
MW-020-1000-MFRMH	1	1778	76	76	38	11.4	305-1322 Nm	6.8

**METRIC SCALE MODELS - TORQUE SCALE IN METRIC ONLY**

CONFIGURATIONS	DRIVE	A	B	C	D	WEIGHT	TORQUE RANGE	INCREMENTS
METRIC	IN.	MM				KG		
MW-006-60NM-RMHSS	3/8	413	47	38	35	1.1	10-60 Nm	0.5
MW-006-100NM-RMHSS	3/8	413	47	38	35	1.1	20-100 Nm	0.5
MW-008-200NM-RMHSS	1/2	503	47	38	35	1.5	40-200 Nm	2
MW-008-340NM-RMHSS	1/2	625	47	39	35	1.5	60-340 Nm	2
MW-010-800NM-RMHSS	3/4	1051	61	58	35	5.4	150-800 Nm	5

**LIMITED WARRANTY**

The HYTORC Clicker Wrench is backed by a one year warranty. This warranty covers manufacturer defects and workmanship. The warranty excludes misuse, abuse and normal wear and tear. Exclusion is not allowed in some states and may not apply. This warranty give you specific legal rights, and you may have other rights, which vary from state to state.

HYTORC owns all content, copyrights, trademarks and patents in this document. © 2022 HYTORC. Any unauthorized use or distribution of any material from this document is strictly prohibited.



**Headquarters:**  
333 Route 17 N., Mahwah, NJ 07430  
+1-201-512-9500

**Email:**  
info@hytorc.com

**Phone:**  
1-800-FOR-HYTORC

**Online:**  
hytorc.com